

# Cross Modulation in the Scamp Signal Processor

S. F. GEORGE, O. D. SLEDGE, AND J. E. ABEL

*Radar Division*

November 21, 1966



**NAVAL RESEARCH LABORATORY**  
**Washington, D.C.**

## CONTENTS

Abstract .....	1
INTRODUCTION .....	1
ANALYSIS OF SCAMP WITH TWO DIFFERENCE SIGNALS .....	1
EQUALLY SPACED SYMMETRICAL CHANNELS .....	4
NONSYMMETRIC CHANNEL SPACING .....	5
UNEQUAL CHANNEL SPACING .....	7
EXPERIMENTAL SIMULATION .....	10
SUMMARY .....	10
REFERENCES .....	10
APPENDIX – Expansion of Terms in Limiter Output .....	11

# Cross Modulation in the Scamp Signal Processor

S. F. GEORGE, O. D. SLEDGE, AND J. E. ABEL

*Radar Division*

Abstract: When two or more signals of different frequencies are fed simultaneously into the input of a limiter, cross-modulation products exist in the output. Such a situation occurs in the Scamp (Single-Channel Monopulse Processor) signal processor when the sum signal and both difference signals (azimuth and elevation) of a monopulse system are processed in a common limiter. The resultant cross modulation can produce deleterious effects, even though the spectra of the three input signals do not overlap. By the use of approximation methods, formulas are developed for the limiter outputs, showing the dependence of the cross-modulation terms on the input amplitudes and phases of both difference channels. Curves are presented illustrating the amount of cross modulation for several arrangements of channel spacing. The largest errors occur when the difference channels are symmetrically located on either side of the reference channel. The errors are substantially reduced by an unsymmetrical or a noncontiguous channel orientation. Experimental results on a simulated Scamp processor agree favorably with the theory.

## INTRODUCTION

A new monopulse processing technique called Scamp (Single-Channel Monopulse Processor) was introduced by Rubin and Kamen (1) in which a difference signal is normalized by the sum signal simultaneously in a single channel. An extension of this technique was also suggested whereby the information was processed by feeding all three channels, *i.e.*, the sum signal and both difference signals (azimuth and elevation), on three separate carriers, into a common wide-band i-f amplifier. The signals are next hard limited and then separated by three narrow-band filters. The amplitude normalization occurs in the limiter, an example of the well-known weak-signal suppression (2). It is the purpose of this present report to develop the theory governing the behavior of Scamp in its fullest embodiment using three carrier frequencies and to demonstrate the existence and effects of deleterious cross modulation between the three signals.

## ANALYSIS OF SCAMP WITH TWO DIFFERENCE SIGNALS

The fundamental implementation of the Scamp technique required to normalize both difference signals simultaneously is shown in Fig. 1. The theoretical analysis of this system which follows will be developed on a constant-amplitude, continuous-wave basis as was the original analysis by Rubin and Kamen. In fact, the theory will proceed in a manner analogous to Rubin and Kamen (1), with the complication of an additional difference signal. Let us define the inputs (Fig. 1) as

$$\begin{aligned}S_a(\omega_a, t) &= A_a \cos(\omega_a t + \phi_a) \\S_s(\omega_s, t) &= A_s \cos(\omega_s t + \phi_s) \\S_e(\omega_e, t) &= A_e \cos(\omega_e t + \phi_e),\end{aligned}\tag{1}$$

where  $A_a$  represents the amplitude of the azimuth difference signal,  $\omega_a$  the azimuth angular carrier frequency,  $\phi_a$  an arbitrary epoch angle, *etc.* Provided the i-f amplifier and summing

---

NRL Problem R02-14; Project RF 001-02-41-4005. This is a final report on one phase of the problem; work is continuing on other phases. Manuscript submitted June 2, 1966.

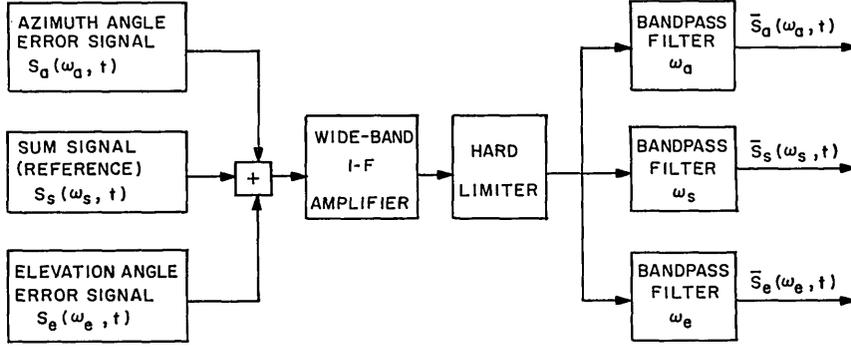


Fig. 1 – Scamp processor for simultaneous normalization of two difference signals

circuit are linear, we can consider the input to the limiter as the sum of the three expressions appearing at the input of the signal processor. Then the limiter input is

$$S(t) = A_a \cos(\omega_a t + \phi_a) + A_s \cos(\omega_s t + \phi_s) + A_e \cos(\omega_e t + \phi_e). \quad (2)$$

We can rewrite Eq. (2) as follows:

$$\begin{aligned} S(t) = & A_a \cos[\omega_s t + (\omega_a - \omega_s)t + \phi_a] + A_s \cos(\omega_s t + \phi_s) \\ & + A_e \cos[\omega_s t + (\omega_e - \omega_s)t + \phi_e], \end{aligned} \quad (3)$$

which can be expanded by trigonometric identities and rearranged to be of the form

$$S(t) = C \cos \omega_s t - D \sin \omega_s t, \quad (4)$$

where we define

$$C = A_a \cos[(\omega_a - \omega_s)t + \phi_a] + A_s \cos \phi_s + A_e \cos[(\omega_e - \omega_s)t + \phi_e] \quad (5)$$

and

$$D = A_a \sin[(\omega_a - \omega_s)t + \phi_a] + A_s \sin \phi_s + A_e \sin[(\omega_e - \omega_s)t + \phi_e]. \quad (6)$$

Equation (4) can also be cast in the form

$$S(t) = \sqrt{C^2 + D^2} \cos(\omega_s t + \psi), \quad (7)$$

where

$$\cos \psi = \frac{C}{\sqrt{C^2 + D^2}} \text{ and } \sin \psi = \frac{D}{\sqrt{C^2 + D^2}}. \quad (8)$$

From Eq. (7) we observe that the input signal can be thought of as an amplitude and phase-modulated signal of unmodulated carrier phase  $\omega_s t$ .

It has been shown by Davenport and Root (3) that the output of an ideal bandpass limiter, when driven by a narrow-band signal, is a signal with a phase modulation identical to that of the

input signal and a constant amplitude ( $4T/\pi$ ), where " $T$ " is the threshold of the limiter. Hence, for the input Eq. (7) we may write the limiter output as

$$L(t) = \frac{4T}{\pi} \cos (\omega_s t + \psi). \quad (9)$$

Expanding  $\cos (\omega_s t + \psi)$  and using Eq. (8) we have

$$L(t) = \frac{4T}{\pi} \frac{C \cos \omega_s t - D \sin \omega_s t}{\sqrt{C^2 + D^2}}. \quad (10)$$

Introducing the expressions for  $C$  and  $D$  from Eqs. (5) and (6) we have the limiter output as:

$$L(t) = \frac{4T}{\pi} \frac{\left[ \frac{A_a}{A_s} \cos (\omega_a t + \phi_a) + \cos (\omega_s t + \phi_s) + \frac{A_e}{A_s} \cos (\omega_e t + \phi_e) \right]}{\left\{ \left[ \left( \frac{A_a}{A_s} \right)^2 + 1 + \left( \frac{A_e}{A_s} \right)^2 \right] + 2 \left[ \frac{A_a}{A_s} \cos [(\omega_s - \omega_a)t + (\phi_s - \phi_a)] \right. \right. \\ \left. \left. + \frac{A_a A_e}{A_s^2} \cos [(\omega_a - \omega_e)t + (\phi_a - \phi_e)] \right. \right. \\ \left. \left. + \frac{A_e}{A_s} \cos [(\omega_s - \omega_e)t + (\phi_s - \phi_e)] \right] \right\}^{1/2}}. \quad (11)$$

For mathematical expedience we write Eq. (11) as

$$L(t) = \frac{4T}{\pi} \left[ \frac{F}{(u+v)^{1/2}} \right] \quad (12)$$

where

$$F = \frac{A_a}{A_s} \cos (\omega_a t + \phi_a) + \cos (\omega_s t + \phi_s) + \frac{A_e}{A_s} \cos (\omega_e t + \phi_e) \\ u = \left( \frac{A_a}{A_s} \right)^2 + 1 + \left( \frac{A_e}{A_s} \right)^2 \\ v = 2 \left[ \frac{A_a}{A_s} \cos [(\omega_s - \omega_a)t + (\phi_s - \phi_a)] + \frac{A_a A_e}{A_s^2} \cos [(\omega_a - \omega_e)t \right. \\ \left. + (\phi_a - \phi_e)] + \frac{A_e}{A_s} \cos [(\omega_s - \omega_e)t + (\phi_s - \phi_e)] \right]. \quad (13)$$

We may expand Eq. (12) in terms of  $v/u$  provided  $u > v$ . This is a valid expansion for small values of  $A_a/A_s$  and  $A_e/A_s$ , in the order of 0.3 or less, regardless of the relative phases of the components of  $v$ . If in fact these phases can be considered random, then the expansion is valid up to  $A_a/A_s = A_e/A_s \cong 0.5$ . Expansion of Eq. (12) yields

$$L(t) = \frac{4T}{\pi} F u^{-1/2} \left( 1 - \frac{v}{2u} + \frac{3v^2}{8u^2} - \frac{5v^3}{16u^3} + \frac{35v^4}{128u^4} - \frac{63v^5}{256u^5} + \dots \right) \quad (14)$$

from which the frequency components are determined upon substitution of the relations in Eq. (13). A partial expansion of the terms in Eq. (14) is presented in the Appendix, up to and including fourth powers of  $A_a/A_s$  and  $A_e/A_s$ . It is seen from these expansions that terms containing sums and differences of almost all multiples of the three carrier input frequencies exist. Some of these give rise to cross modulation at the limiter output.

### EQUALLY SPACED SYMMETRICAL CHANNELS

In order to study the cross-modulation effects in the limiter, the spacing and orientation of the three input channels must be established. Since in general it is difficult to obtain wide-band i-f amplifiers with uniform amplitude and linear phase response, one of the most expedient choices is to use equal spacing of the three signal frequencies and use contiguous channels symmetrically oriented with respect to the sum channel. Such an arrangement is shown in Fig. 2, where  $\omega_s - \omega_a = \omega_e - \omega_s$ . It will be shown that this particular choice is not a good one, since it leads to a large amount of cross modulation in the limiter output.

Let us examine the expansion in the Appendix to determine which terms contribute to the output at the angular frequency  $\omega_a$ . Note that since  $\omega_s - \omega_a = \omega_e - \omega_s$ , terms such as  $2\omega_s - \omega_e$ ,  $2\omega_s - \omega_e - 2\omega_a$ , etc., all exhibit the angular frequency  $\omega_a$ . Collecting those terms only, from the Appendix, we find in Eq. (A8) that the output at  $\omega_a$  is given by

$$\begin{aligned}
 L_1(t)|_{\omega_a} = & \frac{4T}{\pi u^{1/2}} \left\{ \left[ \frac{A_a}{A_s} - \frac{A_a}{2uA_s} \left( 1 + \frac{A_e^2}{A_s^2} \right) + \frac{3A_a}{4u^2A_s} \left( \frac{A_a^2}{A_s^2} + \frac{3A_e^2}{A_s^2} \right) \right. \right. \\
 & - \left. \frac{15A_a}{16u^3A_s} \left( \frac{A_a^2}{A_s^2} + 2\frac{A_e^2}{A_s^2} \right) \right] \cos(\omega_a + \phi_a) \\
 & - \left[ \frac{A_e}{2uA_s} - \frac{3A_e}{4u^2A_s} \left( 2\frac{A_a^2}{A_s^2} + \frac{A_e^2}{2A_s^2} \right) + \frac{15A_e}{16u^3A_s} \left( \frac{A_e^2}{A_s^2} + 2\frac{A_a^2}{A_s^2} \right) \right] \cos(\omega_a + \phi_a + \phi_0) \\
 & + \frac{3}{8} \left[ \frac{A_a^2 A_e}{u^2 A_s^3} \left( 3 - \frac{5}{2u} \right) \right] \cos(\omega_a + \phi_a - \phi_0) \\
 & \left. - \frac{15}{16} \left[ \frac{A_a A_e^2}{u^3 A_s^3} \right] \cos(\omega_a + \phi_a + 2\phi_0) \right\}, \tag{15}
 \end{aligned}$$

where  $u$  has been defined in Eq. (13) and  $\phi_0 = 2\phi_s - \phi_a - \phi_e$ . An inspection of Eq. (15) shows that for  $A_a = 0$ , the output  $L_1(t)|_{\omega_a}$  is a function of  $A_e$ , thus indicating the presence of cross

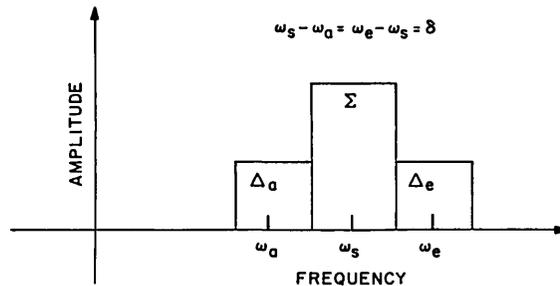


Fig. 2 - Equally spaced symmetrical channels

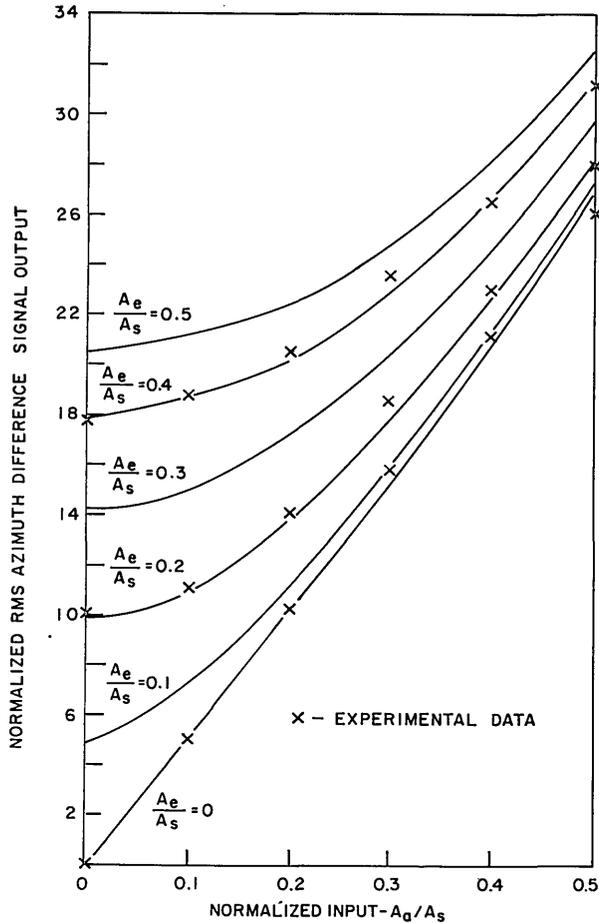


Fig. 3 — Illustration of cross-modulation effect for symmetrical equispaced channels

modulation. The four bracketed terms in Eq. (15) are noted to have the same angular frequency with phase angles which differ by multiples of  $\phi_0$ , a function of random epoch angles. Thus a representative estimate of the output at  $\omega_a$  should be the rms value of the four terms in Eq. (15). A plot of this rms output is presented in Fig. 3. The essentially linear curve for  $A_e/A_s = 0$  represents the correct angle-error output, which approaches zero as  $A_e/A_s \rightarrow 0$  as it should. However, it is seen that for  $A_e/A_s$  not equal to zero, the azimuth difference output does not approach zero as  $A_e/A_s \rightarrow 0$ , but instead exhibits an error which is a function of the elevation difference signal. It is readily understood that this cross talk is a very undesirable situation.

The symmetry in the arrangement of Fig. 2, plus a very quick look at the expansion in the Appendix, permits the use of Eq. (15) for the elevation-error output by merely interchanging  $\omega_a$  and  $\omega_e$ . Hence, Fig. 3 also can be interpreted as the cross modulation in the elevation channel as a function of the azimuth signal.

### NONSYMMETRIC CHANNEL SPACING

A number of methods for substantially reducing this cross modulation could be used. The requirement is that the arrangement or frequency spacing of the difference channels must be

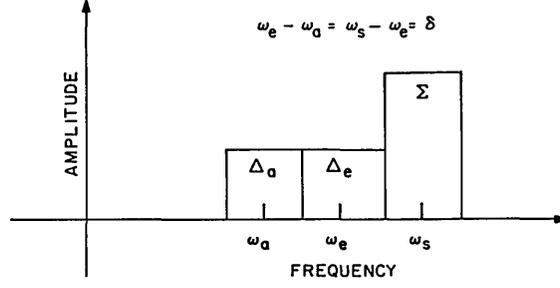


Fig. 4 - Nonsymmetric channel spacing

such as to minimize the mutual interference at the output. Most methods would require more bandwidth than the first one presented above, using equispaced symmetric channels. However, one very simple method\* is the use of the arrangement shown in Fig. 4. Here again we have equal channel spacing, but both difference channels are on the same side of the sum channel. In this case, since the two difference channels are not symmetrically disposed about the reference channel, the amount and effect of cross modulation is not the same in the two difference channels.

Referring again to the Appendix, we find in Eq. (A9) the output at  $\omega_a$ :

$$\begin{aligned}
 L_2(t)|_{\omega_a} = & \frac{4T}{\pi u^{1/2}} \left\{ \left[ \frac{A_a}{A_s} - \frac{A_a}{2uA_s} \left( 1 + \frac{A_e^2}{A_s^2} \right) + \frac{3A_a}{4u^2A_s} \left( \frac{A_a^2}{A_s^2} + \frac{3A_e^2}{A_s^2} \right) \right. \right. \\
 & \left. \left. - \frac{15A_a}{16u^3A_s} \left( \frac{A_a^2}{A_s^2} + \frac{2A_e^2}{A_s^2} \right) \right] \cos(\omega_a t + \phi_a) \right. \\
 & + \left[ -\frac{A_e}{2uA_s} + \frac{3A_e}{8u^2A_s} \left( 4\frac{A_a^2}{A_s^2} + 1 \right) - \frac{15A_e^2}{16u^3A_s^2} \left( 5\frac{A_a^2}{A_s^2} + \frac{A_e^2}{A_s^2} \right) \right. \\
 & + \left. \frac{35A_e^2}{32u^4A_s^2} \left( 3\frac{A_a^2}{A_s^2} + \frac{A_e^2}{A_s^2} \right) \right] \cos(\omega_a t + \phi_a - \phi_0) \\
 & \left. + \left[ \frac{9A_a^2A_e^2}{8u^2A_s^4} - \frac{45A_a^2A_e^2}{16u^3A_s^4} + \frac{105A_a^2A_e^2}{64u^4A_s^4} \cos(\omega_a t + \phi_a + \phi_0) \right] \right\}. \quad (16)
 \end{aligned}$$


In Fig. 5 is shown the rms output from Eq. (16) for the azimuth channel. It is noted that there is still a small residual cross modulation present, but it is far less than in the symmetric case and perhaps is sufficiently small as to be considered innocuous for most applications.

The formula from Eq. (A10) for the output at  $\omega_e$  is:

$$\begin{aligned}
 L_2(t)|_{\omega_e} = & \frac{4T}{\pi u^{1/2}} \left\{ \left[ \frac{A_e}{A_s} - \frac{A_e}{2uA_s} \left( \frac{A_a^2}{A_s^2} + 1 \right) + \frac{3A_e}{4u^2A_s} \left( \frac{A_e^2}{A_s^2} + \frac{3A_a^2}{A_s^2} \right) \right. \right. \\
 & \left. \left. - \frac{15A_e}{16u^3A_s} \left( \frac{A_e^2}{A_s^2} + \frac{2A_a^2}{A_s^2} \right) \right] \cos(\omega_e t + \phi_e) \right. \\
 & + \left[ -\frac{A_aA_e}{uA_s^2} + \frac{3A_aA_e}{4u^2A_s^2} \left( \frac{A_a^2}{A_s^2} + \frac{A_e^2}{A_s^2} + 1 \right) - \frac{15A_aA_e}{4u^3A_s^2} \left( \frac{A_e^2}{A_s^2} + \frac{A_a^2}{A_s^2} \right) \right. \\
 & + \left. \frac{105A_aA_e}{32u^4A_s^2} \left( \frac{A_a^2}{A_s^2} + \frac{A_e^2}{A_s^2} \right) \right] \cos(\omega_e t + \phi_e + \phi_0) \\
 & \left. + \left[ \frac{3A_aA_e^3}{4u^2A_s^4} - \frac{15A_aA_e^3}{8u^3A_s^4} + \frac{35A_aA_e^3}{32u^4A_s^4} \right] \cos(\omega_e t + \phi_e - \phi_0) \right\}. \quad (17)
 \end{aligned}$$

\*Private communication from W. L. Rubín to NRL.

Fig. 5 — Illustration of cross-modulation effect in azimuth channel for unsymmetrically spaced channels

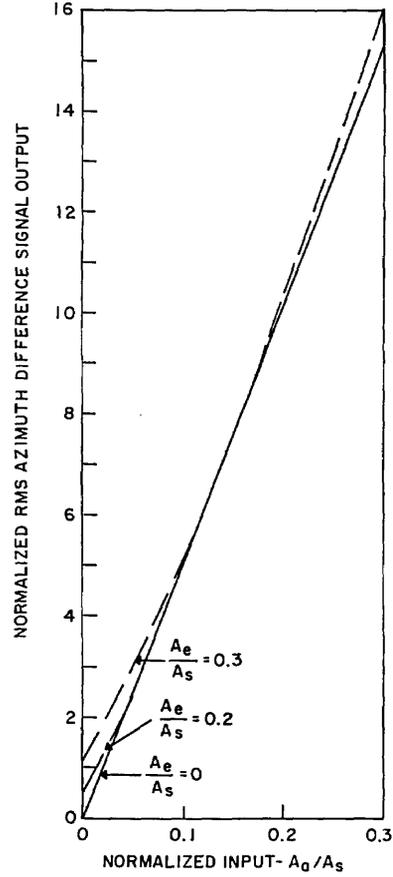

Calculations using Eq. (17) show that there is essentially no cross modulation present in the elevation channel.

### UNEQUAL CHANNEL SPACING

A second method for reducing cross modulation is the use of unequally spaced channels. One example is shown in Fig. 6. Here the spacing of the difference channels is 2:1 with respect to the sum reference channel. From Eq. (A11) in the Appendix the output at  $\omega_a$  is given by:

$$\begin{aligned}
 L_3(t)|_{\omega_a} = & \frac{4T}{\pi u^{1/2}} \left\{ \left[ \frac{A_a}{A_s} - \frac{A_a}{2uA_s} \left( 1 + \frac{A_e^2}{A_s^2} \right) + \frac{3A_a}{4u^2A_s} \left( \frac{A_a^2}{A_s^2} + \frac{3A_e^2}{A_s^2} \right) \right. \right. \\
 & - \left. \frac{15A_a}{16u^3A_s} \left( \frac{A_a^2}{A_s^2} + \frac{2A_e^2}{A_s^2} \right) \right] \cos(\omega_a t + \phi_a) \\
 & + \left[ \frac{3A_a A_e}{4u^2 A_s^2} - \frac{15A_a A_e}{8u^3 A_s^2} \left( \frac{A_a^2}{A_s^2} + \frac{A_e^2}{A_s^2} \right) + \frac{105A_a A_e}{32u^4 A_s^2} \left( \frac{A_a^2}{A_s^2} + \frac{A_e^2}{A_s^2} \right) \right] \cos(\omega_a t + \phi_a + \phi_0) \\
 & \left. + \left[ -\frac{5A_a^3 A_e}{4u^3 A_s^4} + \frac{35A_a^3 A_e}{32u^4 A_s^4} \right] \cos(\omega_a t + \phi_a - \phi_0) \right\}. \tag{18}
 \end{aligned}$$

Figure 7 shows that there is no significant cross modulation in the azimuth channel for this 2:1 spacing.

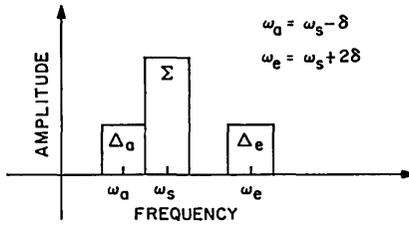


Fig. 6 — Symmetrical but unequally spaced channels

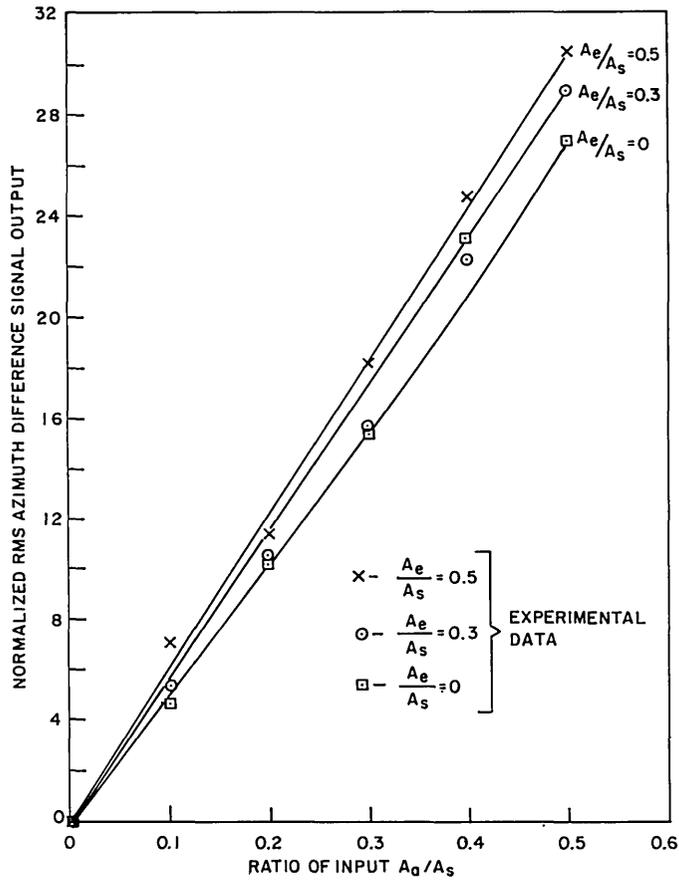


Fig. 7 — Illustration of cross-modulation effect in azimuth channel for unequal spacing of signal channels (2:1)

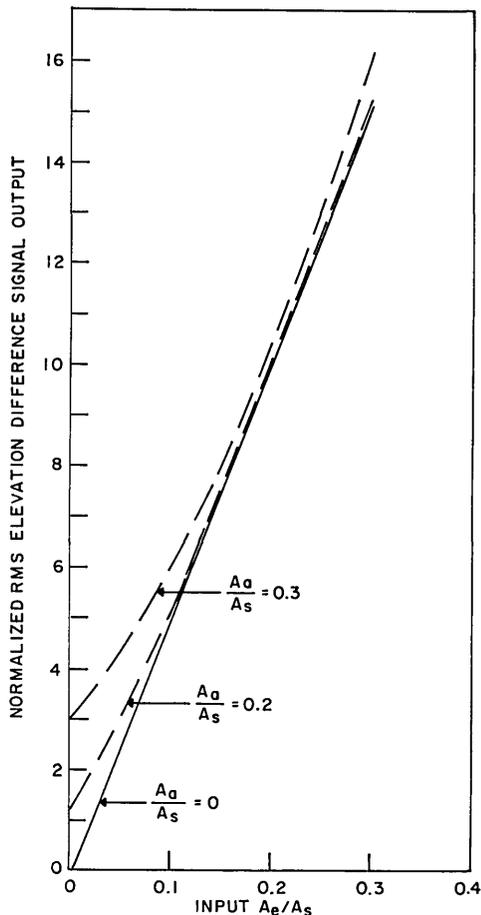


Fig. 8 — Illustration of cross-modulation effect in elevation channel for unequal spacing of signal channels (2:1)

The formula from Eq. (A12) for the output at  $\omega_e$  is:

$$\begin{aligned}
 L_3(t)|_{\omega_e} = & \frac{4T}{\pi u^{1/2}} \left\{ \left[ \frac{A_e}{A_s} - \frac{A_e}{2uA_s} \left( \frac{A_a^2}{A_s^2} + 1 \right) + \frac{3A_e}{4u^2A_s} \left( \frac{A_e^2}{A_s^2} + \frac{3A_a^2}{A_s^2} \right) \right. \right. \\
 & \left. \left. - \frac{15A_e}{16u^3A_s} \left( \frac{A_e^2}{A_s^2} + \frac{2A_a^2}{A_s^2} \right) \right] \cos(\omega_e t + \phi_e) \right. \\
 & + \left[ \frac{3A_a^2}{8u^2A_s^2} - \frac{15A_a^2}{16u^3A_s^2} \left( \frac{A_a^2}{3A_s^2} + \frac{3A_e^2}{A_s^2} \right) + \frac{35A_a^2}{32u^4A_s^2} \left( \frac{A_a^2}{A_s^2} + \frac{3A_e^2}{A_s^2} \right) \right] \cos(\omega_e t + \phi_0 + \phi_e) \\
 & \left. + \left[ -\frac{15A_a^2A_e^2}{8u^3A_s^4} + \frac{105A_a^2A_e^2}{64u^4A_s^4} \right] \cos(\omega_e t + \phi_e - \phi_0) \right\}. \quad (19)
 \end{aligned}$$

The results are presented in Fig. 8, which shows a residual amount of cross modulation in excess of that in the previous example.

## EXPERIMENTAL SIMULATION

In order to verify the theoretical results, measurement of the cross-modulation effects in a simulated Scamp signal processor was made in the laboratory. This was done on a cw basis in the audio-frequency range, using commercial generators as signal sources. A counter was used to monitor the signal frequencies. For the equally spaced case, three input frequencies of 2500, 3000, and 3500 cps were selected, and the output centered on 2500 cps was read on a wave analyzer. The experimental results are shown on Fig. 3 for input ratios of the interfering channel of  $A_e/A_s = 0, 0.2, \text{ and } 0.4$ . It is noted that the agreement with theory is excellent. A check was made to determine whether the final phase detector, which was not included in either the theory or simulation, would have an appreciable effect on the cross modulation. Both theory and experiment indicate that this final phase detector has no significant effect on the output error.

Tests were also made using the 2:1 channel spacing with input frequencies of 2000, 3000, and 3500 cps. The experimental points shown in Fig. 7 provide satisfactory agreement with the theory for this case.

## SUMMARY

The theory of the Scamp signal processor is developed for a complete monopulse system with three channels: a sum signal or reference channel, and azimuth and elevation difference signal channels. Formulas are developed giving the difference-channel outputs for three selected arrangements and spacings of these channels. The worst channel arrangement, from the standpoint of cross modulation, is that of the three equally spaced contiguous channels, with the sum channel in the center. In this situation the cross modulation is intolerably great on both difference channels.

A second and far better arrangement for contiguous equally spaced channels is to place the sum channel at one end, with the two difference channels adjacent. This eliminates any interference in that difference channel nearest the reference but leaves a small residual cross modulation in the more remote difference channel. It is not felt that this would be intolerable for some applications.

A third arrangement using a 2:1 channel spacing yields similar results, but the residual cross modulation in the remote channel is greater than in case two. Wider and unequal separation of the three channels could result in less or no cross modulation if amplifier bandwidth permitted this mechanization. However, it would seem that such a move would tend to reduce one of the main advantages of the Scamp concept.

## REFERENCES

1. Rubin, W.L., and Kamen, S.K., "Scamp: A Single-Channel Monopulse Radar Signal Processing Technique," IRE Trans. MIL-6, 146 (1962)
2. George, S.F., and Wood, J.W., "Ideal Limiting: Part I—The Effect of Ideal Limiting on Signals and On Noise," NRL Report 5683, October 1961
3. Davenport, W.B., Jr., and Root, W.L., "An Introduction to the Theory of Random Signals and Noise," McGraw-Hill Book Co., Inc., New York, p. 288, (1958)

## Appendix

### EXPANSION OF TERMS IN LIMITER OUTPUT

#### INTRODUCTION

In order to simplify the expansion of Eq. (2) the following notation will be adopted:

$$a = \frac{A_a}{A_s}, e = \frac{A_e}{A_s}, r_1 = 2a, r_2 = 2ae, r_3 = 2e$$

$$\alpha_1 = (\omega_s - \omega_a) t + (\phi_s - \phi_a) \quad c_1 = \cos \alpha_1$$

$$\alpha_2 = (\omega_a - \omega_e) t + (\phi_a - \phi_e) \quad c_2 = \cos \alpha_2$$

$$\alpha_3 = (\omega_s - \omega_e) t + (\phi_s - \phi_e) \quad c_3 = \cos \alpha_3$$

$$F = a \cos (\omega_a t + \phi_a) + \cos (\omega_s t + \phi_s) + e \cos (\omega_e t + \phi_e)$$

$$u = a^2 + 1 + e^2 \text{ and } v = r_1 c_1 + r_2 c_2 + r_3 c_3. \quad (\text{A1})$$

Applying the definitions in Eq. (A1) to Eq. (2) we have

$$L(t) = \frac{4T}{\pi} F(u+v)^{-1/2} = \frac{4T}{\pi} u^{-1/2} F\left(1 + \frac{v}{u}\right)^{-1/2}. \quad (\text{A2})$$

Whenever  $v < u$  we can expand  $(1 + v/u)^{-1/2}$  by the binomial theorem

$$L(t) = \frac{4T}{\pi} u^{-1/2} F\left(1 - \frac{v}{2u} + \frac{3v^2}{8u^2} - \frac{5v^3}{16u^3} + \frac{35v^4}{128u^4} - \frac{63v^5}{256u^5} + \dots\right). \quad (\text{A3})$$

The powers of  $v$  expand in terms of the  $r$ 's,  $c$ 's, and  $\alpha$ 's as follows:

$$v = r_1 c_1 + r_2 c_2 + r_3 c_3 = r_1 \cos \alpha_1 + r_2 \cos \alpha_2 + r_3 \cos \alpha_3, \quad (\text{A4})$$

$$v^2 = r_1^2 c_1^2 + r_2^2 c_2^2 + r_3^2 c_3^2 + 2 r_1 r_2 c_1 c_2 + 2 r_1 r_3 c_1 c_3 + 2 r_2 r_3 c_2 c_3$$

$$= \frac{1}{2} (r_1^2 + r_2^2 + r_3^2) + \frac{1}{2} (r_1^2 \cos 2\alpha_1 + r_2^2 \cos 2\alpha_2 + r_3^2 \cos 2\alpha_3)$$

$$+ r_1 r_2 \cos (\alpha_1 - \alpha_2) + r_1 r_2 \cos \alpha_3 + r_1 r_3 \cos \alpha_2$$

$$+ r_1 r_3 \cos (\alpha_1 + \alpha_3) + r_2 r_3 \cos (\alpha_2 + \alpha_3) + r_2 r_3 \cos \alpha_1, \quad (\text{A5})$$

$$v^3 = r_1^3 c_1^3 + r_2^3 c_2^3 + r_3^3 c_3^3 + 6 r_1 r_2 r_3 c_1 c_2 c_3 + 3 r_1^2 c_1^2 r_2 c_2$$

$$+ 3 r_1 c_1 r_2^2 c_2^2 + 3 r_1^2 c_1^2 r_3 c_3 + 3 r_1 c_1 r_3^2 c_3^2 + 3 r_2^2 c_2^2 r_3 c_3$$

$$+ 3 r_2 c_2 r_3^2 c_3^2$$

$$\begin{aligned}
&= \frac{3}{4} (r_1^3 \cos \alpha_1 + r_2^3 \cos \alpha_2 + r_3^3 \cos \alpha_3) + \frac{1}{4} (r_1^3 \cos 3\alpha_1 \\
&\quad + r_2^3 \cos 3\alpha_2 + r_3^3 \cos 3\alpha_3) + \frac{3}{2} r_1 r_2 r_3 (1 + \cos 2\alpha_1 \\
&\quad + \cos 2\alpha_2 + \cos 2\alpha_3) + \frac{3}{2} (r_1^2 r_2 \cos \alpha_2 + r_1 r_2^2 \cos \alpha_1 \\
&\quad + r_1^2 r_3 \cos \alpha_3 + r_1 r_3^2 \cos \alpha_1 + r_2^2 r_3 \cos \alpha_3 + r_2 r_3^2 \cos \alpha_2) \\
&\quad + \frac{3}{4} [r_1^2 r_2 \cos (2\alpha_1 - \alpha_2) + r_1^2 r_2 \cos (\alpha_1 + \alpha_3) \\
&\quad + r_1 r_2^2 \cos (2\alpha_2 - \alpha_1) + r_1 r_2^2 \cos (\alpha_2 + \alpha_3) + r_1^2 r_3 \cos (\alpha_1 - \alpha_2) \\
&\quad + r_1^2 r_3 \cos (2\alpha_1 + \alpha_3) + r_1 r_3^2 \cos (\alpha_2 + \alpha_3) + r_1 r_3^2 \cos (2\alpha_3 + \alpha_1) \\
&\quad + r_2^2 r_3 \cos (\alpha_1 - \alpha_2) + r_2^2 r_3 \cos (2\alpha_2 + \alpha_3) + r_2 r_3^2 \cos (\alpha_1 + \alpha_3) \\
&\quad + r_2 r_3^2 \cos (2\alpha_3 + \alpha_2)], \tag{A6}
\end{aligned}$$

$$\begin{aligned}
v^4 &= r_1^4 c_1^4 + r_2^4 c_2^4 + r_3^4 c_3^4 + 4r_1^3 r_2 c_1^3 c_2 + 4r_1^3 r_3 c_1^3 c_3 \\
&\quad + 4r_1 r_2^3 c_1 c_2^3 + 4r_1 r_3^3 c_1 c_3^3 + 4r_2 r_3^3 c_2 c_3^3 + 4r_2^3 r_3 c_2^3 c_3 \\
&\quad + 6r_1^2 r_2^2 c_1^2 c_2^2 + 6r_1^2 r_3^2 c_1^2 c_3^2 + 6r_2^2 r_3^2 c_2^2 c_3^2 \\
&\quad + 12r_1^2 r_2 r_3 c_1^2 c_2 c_3 + 12r_1 r_2^2 r_3 c_1 c_2^2 c_3 + 12r_1 r_2 r_3^2 c_1 c_2 c_3^2 \\
&= \frac{3}{8} (r_1^4 + r_2^4 + r_3^4) + \frac{1}{2} (r_1^4 \cos 2\alpha_1 + r_2^4 \cos 2\alpha_2 + r_3^4 \cos 2\alpha_3) \\
&\quad + \frac{1}{8} (r_1^4 \cos 4\alpha_1 + r_2^4 \cos 4\alpha_2 + r_3^4 \cos 4\alpha_3) + \frac{3}{2} [r_1^3 r_2 \cos (\alpha_1 - \alpha_2) \\
&\quad + r_1^3 r_2 \cos \alpha_3 + r_1^3 r_3 \cos \alpha_2 + r_1^3 r_3 \cos (\alpha_3 + \alpha_1) \\
&\quad + r_1 r_2^3 \cos (\alpha_1 - \alpha_2) + r_1 r_2^3 \cos \alpha_3 + r_1 r_3^3 \cos \alpha_2 \\
&\quad + r_1 r_3^3 \cos (\alpha_3 + \alpha_1) + r_2 r_3^3 \cos \alpha_1 + r_2 r_3^3 \cos (\alpha_3 + \alpha_2) \\
&\quad + r_2^3 r_3 \cos \alpha_1 + r_2^3 r_3 \cos (\alpha_3 + \alpha_2)] + \frac{1}{2} [r_1^3 r_2 \cos (3\alpha_1 - \alpha_2) \\
&\quad + r_1^3 r_2 \cos (2\alpha_1 + \alpha_3) + r_1^3 r_3 \cos (2\alpha_1 - \alpha_2) + r_1^3 r_3 \cos (3\alpha_1 + \alpha_3) \\
&\quad + r_1 r_2^3 \cos (3\alpha_2 - \alpha_1) + r_1 r_2^3 \cos (2\alpha_2 + \alpha_3) + r_1 r_3^3 \cos (3\alpha_3 - \alpha_1) \\
&\quad + r_1 r_3^3 \cos (3\alpha_3 + \alpha_1) + r_2 r_3^3 \cos (3\alpha_3 - \alpha_2) + r_2 r_3^3 \cos (3\alpha_3 + \alpha_2)
\end{aligned}$$

$$\begin{aligned}
& + r_2^3 r_3 \cos (2\alpha_2 - \alpha_1) + r_2^3 r_3 \cos (3\alpha_2 + \alpha_3)] + \frac{3}{2} (r_1^2 r_2^2 \\
& + r_1^2 r_3^2 + r_2^2 r_3^2) + \frac{3}{2} (r_1^2 r_2^2 \cos 2\alpha_1 + r_1^2 r_2^2 \cos 2\alpha_2 \\
& + r_1^2 r_3^2 \cos 2\alpha_1 + r_1^2 r_3^2 \cos 2\alpha_3 + r_2^2 r_3^2 \cos 2\alpha_2 + r_2^2 r_3^2 \cos 2\alpha_3) \\
& + \frac{3}{4} [r_1^2 r_2^2 \cos 2(\alpha_2 - \alpha_1) + r_1^2 r_2^2 \cos 2\alpha_3 + r_1^2 r_3^2 \cos 2\alpha_2 \\
& + r_1^2 r_3^2 \cos 2(\alpha_3 + \alpha_1) + r_2^2 r_3^2 \cos 2\alpha_1 + r_2^2 r_3^2 \cos 2(\alpha_3 + \alpha_2)] \\
& + 3 [r_1^2 r_2 r_3 \cos \alpha_1 + r_1^2 r_2 r_3 \cos (\alpha_3 + \alpha_2) + r_1 r_2^2 r_3 \cos \alpha_2 \\
& + r_1 r_2^2 r_3 \cos (\alpha_3 + \alpha_1) + r_1 r_2 r_3^2 \cos (\alpha_2 - \alpha_1) + r_1 r_2 r_3^2 \cos \alpha_3] \\
& + \frac{3}{2} [r_1^2 r_2 r_3 \cos \alpha_1 + r_1^2 r_2 r_3 \cos 3\alpha_1 + r_1^2 r_2 r_3 \cos (2\alpha_2 - \alpha_1) \\
& + r_1^2 r_2 r_3 \cos (2\alpha_3 + \alpha_1) + r_1 r_2^2 r_3 \cos \alpha_2 + r_1 r_2^2 r_3 \cos 3\alpha_2 \\
& + r_1 r_2^2 r_3 \cos (2\alpha_1 - \alpha_2) + r_1 r_2^2 r_3 \cos (2\alpha_3 + \alpha_2) + r_1 r_2 r_3^2 \cos (2\alpha_1 + \alpha_3) \\
& + r_1 r_2 r_3^2 \cos (2\alpha_2 + \alpha_3) + r_1 r_2 r_3^2 \cos \alpha_3 + r_1 r_2 r_3^2 \cos 3\alpha_3]. \tag{A7}
\end{aligned}$$

Rather than evaluating all of the terms in Eqs. (A4) through (A7) in terms of the  $\omega$ 's, let us select only those terms which (when multiplied by  $F$ ) possess either a frequency  $\omega_a$  or  $\omega_e$ , for each arrangement of channels considered. In Table A1 are listed the terms arising from  $Fv$ ,  $Fv^2$ , etc.

## 1. EQUISPACED SYMMETRICAL CHANNELS (FIG. 2)

Here  $\omega_s = \omega_s$

$$\omega_a = \omega_s - \delta$$

$$\omega_e = \omega_s + \delta.$$

In Table A1 the terms containing frequency combinations which yield  $\omega_a$  are underlined, and those which yield  $\omega_e$  are marked by an asterisk. Collecting terms on  $\omega_a$ , the output from Eq. (A3) at that angular frequency is (up to fourth degree in the amplitude coefficients,  $a$  and  $e$ )

$$\begin{aligned}
L_1(t)|_{\omega_a} = & \frac{4T}{\pi u^{1/2}} \left\{ \left[ a - \frac{a}{2u} (1 + e^2) + \frac{3a}{4u^2} (a^2 + 3e^2) \right. \right. \\
& \left. \left. - \frac{15a}{16u^3} (a^2 + 2e^2) \right] \cos (\omega_a t + \phi_a) + \left[ -\frac{e}{2u} + \frac{3e}{8u^2} (4a^2 + e^2) \right. \right. \\
& \left. \left. - \frac{15e}{16u^3} (2a^2 + e^2) \right] \cos (\omega_a t + \phi_1) + \left[ \frac{9a^2 e}{8u^2} - \frac{15a^2 e}{16u^3} \right] \cos (\omega_a t + \phi_2) \right. \\
& \left. - \frac{15ae^2}{16u^3} \cos (\omega_a t + \phi_3) \right\}, \tag{A8}
\end{aligned}$$

where  $\phi_1 \equiv 2\phi_s - \phi_e$ ,  $\phi_2 \equiv -(2\phi_s - 2\phi_a - \phi_e)$  and  $\phi_3 \equiv 4\phi_s - \phi_a - 2\phi_e$ . Note the phase change in  $\phi_2$  to keep  $\omega_a$  positive.

TABLE A1  
Terms Arising from  $Fv$ ,  $Fv^2$ ,  $Fv^3$ , and  $Fv^4$

Product	Amplitudes and Frequencies Resulting from Product
$2F \cos \alpha_1$	$a[\omega_s], a[\omega_s - 2\omega_a], 1[2\omega_s - \omega_a], * \underline{1[\omega_a]}, \dagger^\Delta e[\omega_s - \omega_a + \omega_e], e[\omega_s - \omega_a - \omega_e]$
$2F \cos \alpha_2$	$a[\omega_e], * \circ \square a[\omega_e - 2\omega_a], 1[\omega_s + \omega_a - \omega_e], \circ 1[\omega_s - \omega_a + \omega_e], \underline{e[\omega_a]}, \dagger^\Delta e[\omega_a - 2\omega_e]$
$2F \cos \alpha_3$	$a[\omega_s + \omega_a - \omega_e], \circ a[\omega_s - \omega_a - \omega_e], \underline{1[2\omega_s - \omega_e]}, 1[\omega_e], * \circ \square e[\omega_s], e[\omega_s - 2\omega_e] \dagger$
$2F \cos 2\alpha_1$	$a[2\omega_s - \omega_a], * a[2\omega_s - 3\omega_a], 1[\omega_s - 2\omega_a], 1[3\omega_s - 2\omega_a], \square e[2\omega_s - 2\omega_a - \omega_e], e[2\omega_s - 2\omega_a + \omega_e]$
$2F \cos 2\alpha_2$	$a[\omega_a - 2\omega_e], a[3\omega_a - 2\omega_e], 1[\omega_s + 2\omega_a - 2\omega_e], \dagger 1[\omega_s - 2\omega_a + 2\omega_e], e[2\omega_a - 3\omega_e], e[2\omega_a - \omega_e]$
$2F \cos 2\alpha_3$	$a[2\omega_s - 2\omega_e - \omega_a], * a[2\omega_s - 2\omega_e + \omega_a], 1[\omega_s - 2\omega_e], \dagger 1[3\omega_s - 2\omega_e], \underline{e[2\omega_s - \omega_e]}, e[2\omega_s - 3\omega_e]$
$2F \cos (\alpha_1 - \alpha_2)$	$a[\omega_s - \omega_a + \omega_e], a[\omega_s - 3\omega_a + \omega_e], 1[2\omega_s - 2\omega_a + \omega_e], 1[2\omega_a - \omega_e], e[\omega_s - 2\omega_a], e[\omega_s - 2\omega_a + 2\omega_e]$
$2F \cos (\alpha_1 + \alpha_3)$	$\underline{a[2\omega_s - \omega_e]}, \underline{a[2\omega_s - 2\omega_a - \omega_e]}, 1[\omega_s - \omega_a - \omega_e], 1[3\omega_s - \omega_a - \omega_e], \Delta e[2\omega_s - \omega_a], * e[2\omega_s - \omega_a - 2\omega_e] *$
$2F \cos (\alpha_2 + \alpha_3)$	$a[\omega_s - 2\omega_e], \dagger a[2\omega_a + \omega_s - 2\omega_e], \dagger 1[\omega_a + 2\omega_s - 2\omega_e], 1[\omega_a - 2\omega_e], e[\omega_a + \omega_s - \omega_e], \circ e[\omega_a + \omega_s - 3\omega_e] \circ$
$2F \cos 3\alpha_1$	$a[3\omega_s - 4\omega_a], a[3\omega_s - 2\omega_a], \square 1[4\omega_s - 3\omega_a], 1[2\omega_s - 3\omega_a], e[3\omega_s - 3\omega_a - \omega_e], \Delta e[3\omega_s - 3\omega_a + \omega_e]$
$2F \cos 3\alpha_2$	$a[2\omega_a - 3\omega_e], a[4\omega_a - 3\omega_e], 1[\omega_s + 3\omega_a - 3\omega_e], 1[3\omega_a - \omega_s - 3\omega_e], e[3\omega_a - 4\omega_e], e[3\omega_a - 2\omega_e]$
$2F \cos 3\alpha_3$	$a[3\omega_s - 3\omega_e - \omega_a], a[3\omega_s - 3\omega_e + \omega_a], 1[2\omega_s - 3\omega_e], 1[4\omega_s - 3\omega_e], e[3\omega_s - 2\omega_e], e[3\omega_s - 4\omega_e]$
$2F \cos (2\alpha_1 - \alpha_2)$	$a[2\omega_s - 2\omega_a + \omega_e], a[2\omega_s - 4\omega_a + \omega_e], 1[3\omega_s - 3\omega_a + \omega_e], 1[\omega_s - 3\omega_a + \omega_e], e[2\omega_s - 3\omega_a + 2\omega_e], e[2\omega_s - 3\omega_a]$
$2F \cos (2\alpha_2 - \alpha_1)$	$a[2\omega_a - \omega_s - 2\omega_e], a[4\omega_a - \omega_s - 2\omega_e], 1[3\omega_a - 2\omega_s - 2\omega_e], 1[3\omega_a - 2\omega_e], e[3\omega_a - \omega_s - \omega_e], e[3\omega_a - \omega_s - 3\omega_e]$
$2F \cos (2\alpha_1 + \alpha_3)$	$a[3\omega_s - \omega_a - \omega_e], \Delta a[3\omega_s - 3\omega_a - \omega_e], \Delta 1[4\omega_s - 2\omega_a - \omega_e], * \underline{1[2\omega_s - 2\omega_a - \omega_e]}, e[3\omega_s - 2\omega_a - 2\omega_e], \square e[3\omega_s - 2\omega_a] \square$
$2F \cos (2\alpha_3 + \alpha_1)$	$a[3\omega_s - 2\omega_a - 2\omega_e], \square a[3\omega_s - 2\omega_e], \underline{1[4\omega_s - \omega_a - 2\omega_e]}, 1[2\omega_s - \omega_a - 2\omega_e], * e[3\omega_s - \omega_a - \omega_e], \Delta e[3\omega_s - \omega_a - 3\omega_e]$

NOTE: The symbols \*, †, Δ, ○, □, and the underlining are explained in this appendix.

(Table Continues)

TABLE A1 (Continued)  
 Terms Arising from  $Fv$ ,  $Fv^2$ ,  $Fv^3$ , and  $Fv^4$

Product	Amplitudes and Frequencies Resulting from Product
$2F \cos (2\alpha_2 + \alpha_3)$	$a[3\omega_a + \omega_s - 3\omega_e]$ , $a[\omega_a + \omega_s - 3\omega_e]$ , <sup>o</sup> $1[2\omega_a + 2\omega_s - 3\omega_e]$ , <sup>o</sup> $1[2\omega_a - 3\omega_e]$ , $e[2\omega_a + \omega_s - 4\omega_e]$ , $e[2\omega_a + \omega_s - 2\omega_e]$ †
$2F \cos (2\alpha_3 + \alpha_2)$	$a[2\omega_s + 2\omega_a - 3\omega_e]$ , <sup>o</sup> $a[2\omega_s - 3\omega_e]$ , <sup>o</sup> $1[3\omega_s + \omega_a - 3\omega_e]$ , $1[\omega_s + \omega_a - 3\omega_e]$ , <sup>o</sup> $e[2\omega_s + \omega_a - 4\omega_e]$ ,† $e[2\omega_s + \omega_a - 2\omega_e]$
$2F \cos 4\alpha_1$	$a[4\omega_s - 3\omega_a]$ , $a[4\omega_s - 5\omega_a]$ , $1[3\omega_s - 4\omega_a]$ , $1[5\omega_s - 4\omega_a]$ , $e[4\omega_s - 4\omega_a - \omega_e]$ , $e[4\omega_s - 4\omega_a + \omega_e]$
$2F \cos 4\alpha_2$	$a[5\omega_a - 4\omega_e]$ , $a[3\omega_a - 4\omega_e]$ , $1[4\omega_a - 4\omega_e - \omega_s]$ , $1[4\omega_a - 4\omega_e + \omega_s]$ , $e[4\omega_a - 5\omega_e]$ , $e[4\omega_a - 3\omega_e]$
$2F \cos 4\alpha_3$	$a[4\omega_s - 4\omega_e + \omega_a]$ , $a[4\omega_s - 4\omega_e - \omega_a]$ , $1[5\omega_s - 4\omega_e]$ , $1[3\omega_s - 4\omega_e]$ , $e[4\omega_s - 3\omega_e]$ , $e[4\omega_s - 5\omega_e]$
$2F \cos (3\alpha_1 - \alpha_2)$	$a[3\omega_s - 5\omega_a + \omega_e]$ , $a[3\omega_s - 3\omega_a + \omega_e]$ , $1[4\omega_s - 4\omega_a + \omega_e]$ , $1[2\omega_s - 4\omega_a + \omega_e]$ , $e[3\omega_s - 4\omega_a + 2\omega_e]$ , $e[3\omega_s - 4\omega_a]$
$2F \cos (3\alpha_1 + \alpha_3)$	$a[4\omega_s - 4\omega_a - \omega_e]$ , $a[4\omega_s - 2\omega_a - \omega_e]$ ,* $1[5\omega_s - 3\omega_a - \omega_e]$ , $1[3\omega_s - 3\omega_a - \omega_e]$ , <sup>Δ</sup> $e[4\omega_s - 3\omega_a - 2\omega_e]$ , $e[4\omega_s - 3\omega_a]$
$2F \cos (3\alpha_2 - \alpha_1)$	$a[5\omega_a - \omega_s - 3\omega_e]$ , $a[3\omega_a - \omega_s - 3\omega_e]$ , $1[4\omega_a - 2\omega_s - 3\omega_e]$ , $1[4\omega_a - 3\omega_e]$ , $e[4\omega_a - \omega_s - 4\omega_e]$ , $e[4\omega_a - \omega_s - 2\omega_e]$
$2F \cos (3\alpha_3 - \alpha_1)$	$a[2\omega_s - 3\omega_e]$ , <sup>o</sup> $a[2\omega_s - 3\omega_e + 2\omega_a]$ , <sup>o</sup> $1[3\omega_s - 3\omega_e + \omega_a]$ , $1[\omega_s - 3\omega_e + \omega_a]$ , <sup>o</sup> $e[2\omega_s - 4\omega_e + \omega_a]$ ,† $e[2\omega_s - 2\omega_e + \omega_a]$
$2F \cos (3\alpha_3 + \alpha_1)$	$a[4\omega_s - 3\omega_e]$ , $a[4\omega_s - 3\omega_e - 2\omega_a]$ ,* $1[3\omega_s - 3\omega_e - \omega_a]$ , $1[5\omega_s - 3\omega_e - \omega_a]$ , $e[4\omega_s - 4\omega_e - \omega_a]$ , $e[4\omega_s - 2\omega_e - \omega_a]$
$2F \cos (3\alpha_3 - \alpha_2)$	$a[3\omega_s - 2\omega_e]$ , $a[3\omega_s - 2\omega_e - 2\omega_a]$ , <sup>□</sup> $1[4\omega_s - 2\omega_e - \omega_a]$ , $1[2\omega_s - 2\omega_e - \omega_a]$ ,* $e[3\omega_s - 3\omega_e - \omega_a]$ , $e[3\omega_s - \omega_e - \omega_a]$ <sup>Δ</sup>
$2F \cos (3\alpha_3 + \alpha_2)$	$a[3\omega_s - 4\omega_e]$ , $a[3\omega_s - 4\omega_e + 2\omega_a]$ , $1[4\omega_s - 4\omega_e + \omega_a]$ , $1[2\omega_s - 4\omega_e + \omega_a]$ ,† $e[3\omega_s - 5\omega_e + \omega_a]$ , $e[3\omega_s - 3\omega_e + \omega_a]$
$2F \cos (3\alpha_2 + \alpha_3)$	$a[4\omega_a + \omega_s - 4\omega_e]$ , $a[2\omega_a + \omega_s - 4\omega_e]$ , $1[3\omega_a - 4\omega_e]$ , $1[3\omega_a + 2\omega_s - 4\omega_e]$ ,† $e[3\omega_a + \omega_s - 5\omega_e]$ , $e[3\omega_a + \omega_s - 3\omega_e]$
$2F \cos 2(\alpha_2 - \alpha_1)$	$a[5\omega_a - 2\omega_s - 2\omega_e]$ , $a[3\omega_a - 2\omega_s - 2\omega_e]$ , $1[4\omega_a - 3\omega_s - 2\omega_e]$ , $1[4\omega_a - \omega_s - 2\omega_e]$ , $e[4\omega_a - 2\omega_s - 3\omega_e]$ , $e[4\omega_a - 2\omega_s - \omega_e]$
$2F \cos 2(\alpha_3 + \alpha_1)$	$a[4\omega_s - 3\omega_a - 2\omega_e]$ , $a[4\omega_s - \omega_a - 2\omega_e]$ , $1[3\omega_s - 2\omega_a - 2\omega_e]$ , <sup>□</sup> $1[5\omega_s - 2\omega_a - 2\omega_e]$ , $e[4\omega_s - 2\omega_a - 3\omega_e]$ ,* $e[4\omega_s - 2\omega_a - \omega_e]$ *
$2F \cos 2(\alpha_3 + \alpha_2)$	$a[3\omega_a + 2\omega_s - 4\omega_e]$ ,† $a[\omega_a + 2\omega_s - 4\omega_e]$ ,† $1[2\omega_a + 3\omega_s - 4\omega_e]$ , $1[2\omega_a + \omega_s - 4\omega_e]$ , $e[2\omega_a + 2\omega_s - 5\omega_e]$ , <sup>o</sup> $e[2\omega_a + 2\omega_s - 3\omega_e]$ <sup>o</sup>

Collecting terms on  $\omega_e$  yields the same expression as Eq. (A8), except  $a \rightarrow e$ ,  $e \rightarrow a$ ,  $\omega_a \rightarrow \omega_e$ ,  $\phi_a \rightarrow \phi_e$ , and  $\phi_e \rightarrow \phi_a$  so that  $\phi_1 \equiv 2\phi_s - \phi_a$ , etc. One would expect this symmetry, since the  $\omega_a$  and  $\omega_e$  channels are symmetrically spaced about the center sum channel,  $\omega_s$ . If we let  $\phi_0 = 2\phi_s - \phi_a - \phi_e$  for the  $\omega_a$  channel, then  $\phi_1 = \phi_a + \phi_0$ ,  $\phi_2 = +\phi_a - \phi_0$  and  $\phi_3 = \phi_a + 2\phi_0$ .

## 2. EQUISPACED NONSYMMETRICAL CHANNELS (FIG. 4)

Here  $\omega_a = \omega_s$

$$\omega_e = \omega_a + \delta$$

$$\omega_s = \omega_a + 2\delta$$

In Table A1 the terms containing frequency combinations which yield  $\omega_a$  are marked by a † and those which yield  $\omega_e$  by a ○. If we let  $\phi_0 = \phi_s + \phi_a - 2\phi_e$ , then the output from Eq. (A3) at  $\omega_a$  is:

$$\begin{aligned} L_2(t)|_{\omega_a} = & \frac{4T}{\pi u^{1/2}} \left\{ \left[ a - \frac{a(1+e^2)}{2u} + \frac{3a(a^2+3e^2)}{4u^2} - \frac{15a(a^2+2e^2)}{16u^3} \right] \cos(\omega_a t + \phi_a) \right. \\ & + \left[ -\frac{e^2}{2u} + \frac{3e^2}{8u^2}(4a^2+1) - \frac{15e^2}{16u^3}(5a^2+e^2) + \frac{35e^2}{32u^4}(3a^2+e^2) \right] \cos(\omega_a t + \phi_a - \phi_0) \\ & \left. + \left[ \frac{9a^2e^2}{8u^2} - \frac{45a^2e^2}{16u^3} + \frac{105a^2e^2}{64u^4} \cos(\omega_a t + \phi_a + \phi_0) \right] \right\}. \end{aligned} \quad (\text{A9})$$

Again, if we let  $\phi_0 = \phi_s + \phi_a - 2\phi_e$ , then the output from Eq. (A3) at  $\omega_e$  is:

$$\begin{aligned} L_2(t)|_{\omega_e} = & \frac{4T}{\pi u^{1/2}} \left\{ \left[ e - \frac{e(a^2+1)}{2u} + \frac{3e(e^2+3a^2)}{4u^2} - \frac{15e(e^2+2a^2)}{16u^3} \right] \cos(\omega_e t + \phi_e) \right. \\ & + \left[ -\frac{ae}{u} + \frac{3ae(a^2+e^2+1)}{4u^2} - \frac{15ae(e^2+a^2)}{4u^3} + \frac{105ae(a^2+e^2)}{32u^4} \right] \cos(\omega_e t + \phi_e + \phi_0) \\ & \left. + \left[ \frac{3ae^3}{4u^2} - \frac{15ae^3}{8u^3} + \frac{35ae^3}{32u^4} \right] \cos(\omega_e t + \phi_e - \phi_0) \right\}. \end{aligned} \quad (\text{A10})$$

Once more note the change in sign of phases to keep  $\omega_a$  and  $\omega_e$  positive.

## 3. UNEQUALLY SPACED CHANNELS (FIG. 6)

Here  $\omega_s = \omega_a$

$$\omega_a = \omega_s - \delta$$

$$\omega_e = \omega_s + 2\delta$$

In Table A1 the terms containing frequency combinations which yield  $\omega_a$  are marked by a  $\Delta$  and those which yield  $\omega_e$  by a  $\square$ . If we let  $\phi_0 = 3\phi_s - 2\phi_a - \phi_e$ , then the output from (A3) at  $\omega_a$  is:

$$\begin{aligned} L_3(t)|_{\omega_a} = & \frac{4T}{\pi u^{1/2}} \left\{ \left[ a - \frac{a(1+e^2)}{2u} + \frac{3a(a^2+3e^2)}{4u^2} - \frac{15a(a^2+2e^2)}{16u^3} \right] \cos(\omega_a t + \phi_a) \right. \\ & + \left[ \frac{3ae}{4u^2} - \frac{15ae(a^2+e^2)}{8u^3} + \frac{105ae(a^2+e^2)}{32u^4} \right] \cos(\omega_a t + \phi_a + \phi_0) \\ & \left. + \left[ -\frac{5a^3e}{4u^3} + \frac{35a^3e}{32u^4} \right] \cos(\omega_a t + \phi_a - \phi_0) \right\}. \end{aligned} \quad (\text{A11})$$

Again if we let  $\phi_0 = 3\phi_s - 2\phi_a - \phi_e$ , then the output from Eq. (A3) at  $\omega_e$  is:

$$\begin{aligned}
 L_3(t)|_{\omega_e} = & \frac{4T}{\pi u^{1/2}} \left\{ \left[ e - \frac{e(a^2 + 1)}{2u} + \frac{3e(e^2 + 3a^2)}{4u^2} - \frac{15e(e^2 + 2a^2)}{16u^3} \right] \cos(\omega_e t + \phi_e) \right. \\
 & + \left[ \frac{3a^2}{8u^2} - \frac{15a^2}{16u^3} \left( \frac{a^2}{3} + 3e^2 \right) + \frac{35a^2}{32u^4} (a^2 + 3e^2) \right] \cos(\omega_e t + \phi_0 + \phi_e) \\
 & \left. + \left[ -\frac{15a^2 e^2}{8u^3} + \frac{105a^2 e^2}{64u^4} \right] \cos(\omega_e t + \phi_e - \phi_0) \right\}. \tag{A12}
 \end{aligned}$$

Note the phase sign change to keep  $\omega_a$  and  $\omega_e$  positive.



## DOCUMENT CONTROL DATA - R&amp;D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Naval Research Laboratory Washington, D.C. 20390		2a. REPORT SECURITY CLASSIFICATION Unclassified	
		2b. GROUP	
3. REPORT TITLE CROSS MODULATION IN THE SCAMP SIGNAL PROCESSOR			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) A final report on one phase of the problem.			
5. AUTHOR(S) (Last name, first name, initial) George, Samuel F., Sledge, Oliver D., and Abel, John E.			
6. REPORT DATE November 21, 1966		7a. TOTAL NO. OF PAGES 20	7b. NO. OF REFS 3
8a. CONTRACT OR GRANT NO. NRL Problem R02-14		9a. ORIGINATOR'S REPORT NUMBER(S) NRL Report 6443	
b. PROJECT NO. RF 001-02-41-4005			
c.		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.			
10. AVAILABILITY/LIMITATION NOTICES Distribution of this document is unlimited.			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY Department of the Navy (Office of Naval Research), Washington, D.C. 20360	
13. ABSTRACT When two or more signals of different frequencies are fed simultaneously into the input of a limiter, cross-modulation products exist in the output. Such a situation occurs in the Scamp (Single-Channel Monopulse Processor) signal processor when the sum signal and both difference signals (azimuth and elevation) of a monopulse system are processed in a common limiter. The resultant cross modulation can produce deleterious effects, even though the spectra of the three input signals do not overlap. By the use of approximation methods, formulas are developed for the limiter outputs, showing the dependence of the cross-modulation terms on the input amplitudes and phases of both difference channels. Curves are presented illustrating the amount of cross modulation for several arrangements of channel spacing. The largest errors occur when the difference channels are symmetrically located on either side of the reference channel. The errors are substantially reduced by an unsymmetrical or a noncontiguous channel orientation. Experimental results on a simulated Scamp processor agree favorably with the theory.			

Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Cross modulation Monopulse radar Signal processing Scamp signal processor Hard limiting Radio interference						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, roles, and weights is optional.